

Valid April 1st - June 30th

www.fowlerprecision.com



- · High precision bearing guide system for long life
- Interchangeable magnetic base
- · High visibility LED indicator
- Uses 2, 1.5V batteries (SR44 or LR44)
- Battery life approximately 250 hours (on time)

Jimm	· _ ·	
	一一,	0
	040.00	
	Ø20.00	Ø0.97*

2.0 2

Order No.	Model	Dimensions	List Price	Sale Price
54-188-140-0	Metric	Height: 1.57"/40mm, Dia. 0.78"/20mm	\$267.70	\$240.00
54-188-150-0	Inch	Height: 2"/50.8mm, Dia. 0.97"/24.638mm	267.70	240.00



Indicator Base Attachments for measuring depths, steps, recesses etc.

- Turn your dial or electronic indicator into a depth gage (may reduce range)
- 4" length
- · Fits indicators with 3/8" and 8mm mounting stems
- Ground and lapped base
- 52-125-005-0 has 0.430" radius

52-125-004-0

Includes 4 extension points!

Order No.	Description	List Price	Sale Price
52-125-004-0	Flat depth base attachment	\$41.30	\$37.20
52-125-005-0	Radius style depth base attachment	41.30	37.20

Indicator Chucks for finer applications



Order No.	Description	List Price	Sale Price
52-526-020-0	Indicator Chuck with 4 - 48 thread	\$24.20	\$21.80
52-526-021-0	Indicator Chuck with M2.5 thread	24.20	21.80

Indicator Magnetic Base with Fine Adjustment

- · 85 lb pull magnetic base
- V-bottom base allows mounting on cylindrical surfaces
- · On/off lever releases magnet

Sale

- Base dimensions 2-1/2" x 2-1/8" x 2"(63.5mm x 54mm x 50mm)
- Mounts test indicators with 1/4" post mount and AGD indicators
- Use with milling machines, lathes, etc.

Order No. 52-585-020-0



Prices & Specifications are subject to change without notice.

List \$72.70

Flex Arm Indicator Magnetic Base

- · Corrosion resistant chrome plated flex arm
- 85 lb pull magnetic base
- On/off lever releases magnet
- · Base can be mounted vertically as well as horizontally
- V-bottom base allows mounting on cylindrical surfaces
- Base dimensions 2-1/2" x 2-1/8" x 2"(63.5mm x 54mm x 50mm)
- Adjusts to virtually any position

Order No. 52-585-045-0



List \$104.30

High Precision Dial Gage Stand

Fowler's High Precision Dial Gage Stand is 10" in overall height with a precision serrated anvil

- · Quick positioning and adjustment
- · Zero settings with fine adjustment
- Fine adjustment range of 5/32"
- Total height of column 8"
- Dial gage stand holds indicators with stems of 3/8" and 8mm
- 2" Serrated anvil

Order No. 52-580-011-0



List \$232.10

Granite Dial Gage Stand

Fowler's Workshop Black Granite Stand is ideal for shop-floor use!


- Flatness: 0.00005"
- · Sturdy and compact with extreme stability.
- 6" x 6" x 2" granite base
- Positive lock screw
- · Fine adjustment knob for zero setting of gages
- Column height is 8"
- Accepts all lug-back indicators


Indicator not included with stand

Order No. 52-580-030-0

Sale \$100.00 List \$125.00

Find us on social media

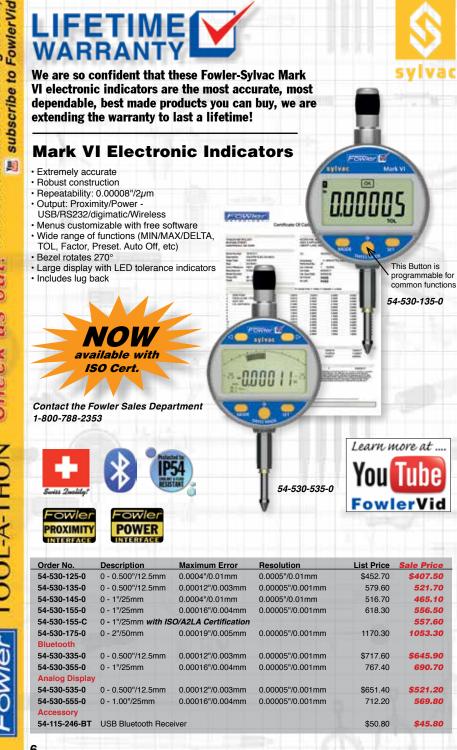

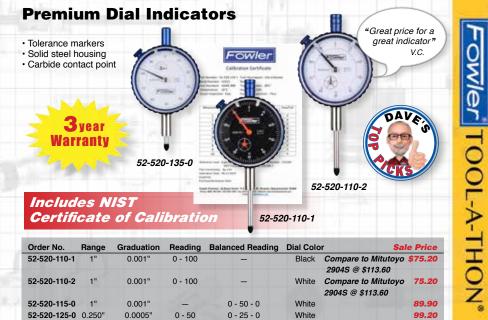

Order No.	Range	Graduation	Reading	Balanced Reading	Dial Colo	r Sale Price
52-520-110-1	1"	0.001"	0 - 100	-	Black	Compare to Mitutoyo \$75.20 2904S @ \$113.60
52-520-110-2	1"	0.001"	0 - 100	_	White	Compare to Mitutoyo 75.20
						2904S @ \$113.60
52-520-115-0	1"	0.001"	-	0 - 50 - 0	White	89.90
52-520-125-0	0.250"	0.0005"	0 - 50	0 - 25 - 0	White	99.20
52-520-129-0	1"	0.0005"	0 - 50	0 - 25 - 0	White	90.80
52-520-135-0	0.05"	0.0001"	0 - 10	0 - 5 - 0	White	130.20
52-520-300-0	10mm	0.01mm	0 - 100	0 - 50 - 0	White	85.80
52-520-500-0	25mm	0.01mm	0 - 100	0 - 50 - 0	White	114.40

DUAL PLUS+ Dial Indicator

- Two dial indicators in one
- · Inch on one side and metric on the opposite side
- Range: 0.5"/12.5mm
- Graduation: 0.001"/0.01mm
- 8mm mounting stem with 3/8" adapter bushing included
- · Jeweled movements
- Carbide contact point
- · 1" spline contact point included for fine applications
- · Includes NIST certificate for both inch and metric readings

Inch Reading Side




Order No. 52-530-115-0





Find us on social media

Prices & Specifications are subject to change without notice.

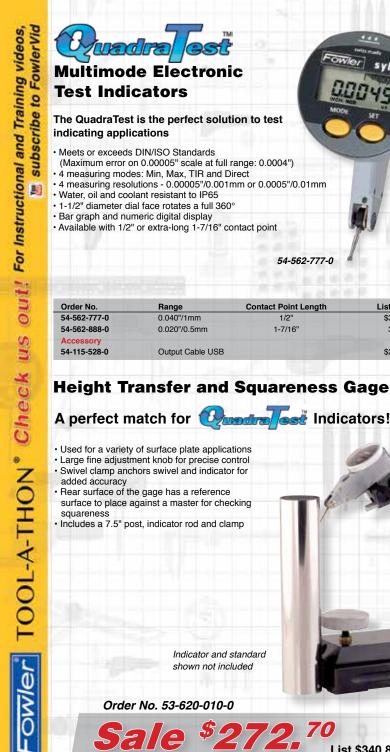

Indicator and standard shown not included

Order No. 53-620-010-0

Range

0.040"/1mm

0.020"/0.5mm

Output Cable USB



Prices & Specifications are subject to change without notice.

72,70

List \$340.80

sylvac

List Price

\$358.60

388.90

\$242.90

54-562-777-0

Contact Point Length

1/2"

1-7/16"

iss Quality

-owler

S-232

DIRECT

owle POWER

26

Sale Price

\$330.00

360.00

\$218.70

Any Indicator on this page \$110.00

Test Indicators

All Fowler Test Indicators include bi-directional constant clockwise rotation, automatic reversal, three dovetail mountings, jeweled movement, two dovetail clamps and a molded case.



Order No.	Face Color	Total Range	Dial Reading	Graduation	Dial Diameter	Point Lenath	List Price	Sale Price
52-562-774-0	white	0.030"	0-15-0	0.001"	1"	1/2"	\$125.70	\$110.00
52-562-778-0	black	0.030"	0-15-0	0.0005"	1"	1/2"	133.60	110.00
52-562-775-0	white	0.030"	0-15-0	0.0005"	1"	1/2"	133.60	110.00
52-562-776-0	white	0.030"	0-15-0	0.0005"	1-1/2"	1/2"	139.70	110.00
52-562-780-0	black	0.030"	0-15-0	0.0005"	1-1/2"	1/2"	139.70	110.00

Extra Points .040" 120" 52-563-770-0 52-563-771-0 0.0001" Reading

Order	Face	Total	Dial	1000	Dial	Point	List	Sale
No.	Color	Range	Reading	Graduation	Diameter	Length	Price	Price
52-563-770-0	white	0.008"	0-4-0	0.0001"	1"	1/2"	\$133.60	\$110.00
52-563-771-0	black	0.008"	0-4-0	0.0001"	1"	1/2"	133.60	110.00
52-563-772-0	black	0.008"	0-4-0	0.0001"	1-1/2"	1/2"	133.60	110.00
52-563-777-0	white	0.008"	0-4-0	0.0001"	1-1/2"	1/2"	133.60	110.00




Order	Face	Total	Dial		Dial	Point	List	Sale
No.	Color	Range	Reading	Graduation	Diameter	Length	Price	Price
52-562-782-0	black	0.020"	0-10-0	0.0005"	1"	1-7/16"	\$137.60	\$110.00
52-562-783-0	white	0.020"	0-10-0	0.0005"	1-1/2"	1-7/16"	137.60	110.00

Extra	Points		(Calorina)					
.040"	.120"		(bri).	R.		0.01 Rea	mm ding
Order No.	Face Color	Total Range	Dial Reading	Graduation	Dial Diameter	Point Length	List Price	Sale Price
52-563-677-0	white	0.08mm	0-40-0	0.01mm	1-1/4"	1/2"	\$137.60	\$110.00

Prices & Specifications are subject to change without notice.

Find us on social media

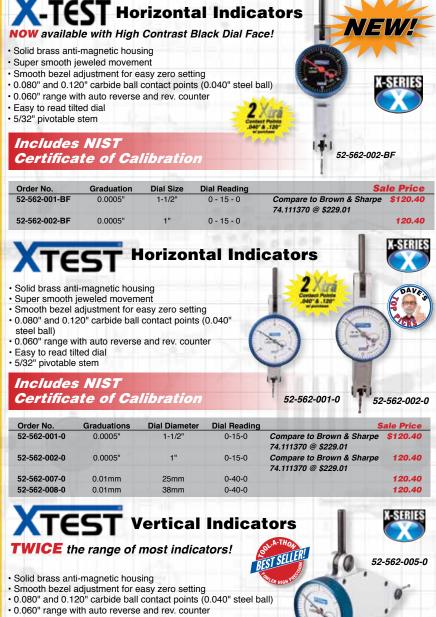

5/32" pivotable stem

Includes NIST Certificate of Calibration

Order No.	Graduations	Dial Diameter	Dial Reading	List Price	Sale Price
52-562-004-0	0.0005"	1-1/2"	0-15-0	\$146.40	\$131.80
52-562-005-0	0.0005"	1"	0-15-0	146.40	131.80
52-562-006-0	0.001"	1"	0-15-0	146.40	131.80



Order No.	Description	Graduations	List Price	Sale Price
52-562-100-0	52-562-001-0 w/accessories	0.0005"	\$196.30	\$170.00
52-562-110-0	52-562-002-0 w/accessories	0.0005"	196.30	170.00
52-562-120-0	52-562-003-0 w/accessories	0.001"	196.30	170.00

Test Indicator Set with Certificate of Calibration

Test Indicator:

- Auto-reverse
- · Jeweled movement
- · Range: 0.030"
- Graduation: 0.0005"
- · Dial Reading: 0-15-0
- Dial Diameter: 1.125" Point length: 0.400"
- · Carbide contact points, 0.080" and 0.040"

Set Also Includes:

- Universal clamp
- · Height gage attachment
- 3/8" & 1/4" dovetail clamps
- Manufacturer's test certificate

1.385-1

- Meets ANSI Specs for accuracy
- · All in a fitted molded case

Order No. 52-562-999-0



Indi-All Test Holder

Fowler's Indi-all indicator holder finds the center position without removing the tool from the machine. It mounts with a single set screw directly on the machine guill, bypassing the working tool. Use for milling machines, jigborers and Bridgeport mills (J-head).

- · Clamping dia. 1-7/8"; 3 point adjustment
- · Accepts all indicators with 5/32" shank or dovetail. Reach from 0-12" diameter
- · Provides readings accurately and quickly without disturbing the workpiece

Sale

Arm length from clamp 4-1/2"

Order No. 52-566-853-0



List \$73.50

Prices & Specifications are subject to change without notice.

8-

80



0.0005"/0.01mm

0.0005"/0.01mm

Ultra-Cal VI	
Proximity Electron	nic Calipers

USB bluetooth receiver

8"/200mm

12"/300mm

6"/150mm with ISO/A2LA Certification

0.0012"/30µm

0.0012"/30µm



327.30

581.40

774.60

\$45.80

IP67 rated

54-100-167-C

54-100-168-0

54-100-169-0

Accessory 54-115-246-BT

- · Ultra-Cal VI technology with proximity cable data output
- Heavy duty frame
- · Extra large display
- · 12"/300mm is supplied without depth rod



54-100-444-1


Order No.	Description	Accuracy	Resolution		Sale Price
54-100-444-1	6"/150mm	0.0008"/20µm	0.0005"/0.01mm	Compare to Mitutoyo 500-171-30 @ \$159.95	\$146.70
54-100-448-1	8"/200mm	0.0012"/30µm	0.0005"/0.01mm		264.90
54-100-412-1	12"/300mm	0.0012"/30µm	0.0005"/0.01mm		354.70
Connectivity C	ables				
54-115-526-0	Proximity cable	with USB connection	on		\$135.00
54-155-527-0	Proximity cable	with serial connect	ion		135.00





Range	Accuracy	5	Sale Price
0 - 4"/100mm	0.001"/0.02mm		\$101.10
0 - 6"/150mm	0.001"/0.02mm	Compare to Mitutoyo 500-196-30 @ \$141.40	117.90
0 - 8"/200mm	0.0015"/0.04mm		138.40
0 - 12"/300mm	0.0015"/0.04mm		180.40
Wireless transmi	itter		100.00
SPC cable (USB	3)		137.60
	0 - 4"/100mm 0 - 6"/150mm 0 - 8"/200mm 0 - 12"/300mm Wireless transm	0 - 4"/100mm 0.001"/0.02mm 0 - 6"/150mm 0.001"/0.02mm 0 - 8"/200mm 0.0015"/0.04mm	0 - 4"/100mm 0.001"/0.02mm 0 - 6"/150mm 0.001"/0.02mm Compare to Mitutoyo 500-196-30 @ \$141.40 0 - 8"/200mm 0.0015"/0.04mm 0 - 12"/300mm 0.0015"/0.04mm Wireless transmitter

Water Resistant IP54 Electronic Calipers

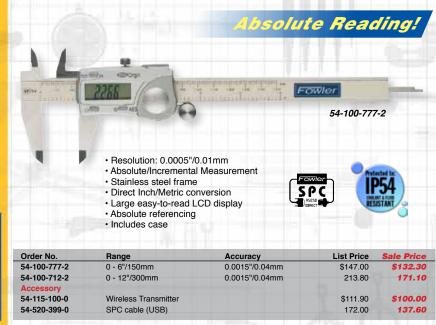






TOOL-A-THON Check us out! For Instructional and Training videos, subscribe to FowlerVid 30



- All sizes permit inside and outside measurements
- · For larger workpieces, the long jaws permit greater accessibility and easier measurements
- Includes case

Order No.	Range	Graduation	Jaw Depth	List Price	Sale Price
52-085-012-0	12"/300mm	0.001"/0.02mm	3"	\$110.40	\$88.40
52-085-024-0	24"/600mm	0.001"/0.02mm	4"	189.20	151.40
52-085-040-0	40"/1000mm	0.001"/0.02mm	5-1/2"	629.50	503.60





NEW Bluetooth Ranges NOW Available!

Contact the Fowler Sales Department

available with ISO Cert

Adjustable measuring force, 5N/10N (54-815-030-0 only)

1-800-788-2353

- · USB output or bluetooth available
- Menu customizable with free software
- Position recall

LIFE

Automatic switch off



best mic I have ever had. One little thing or should I rephrase that, one huge thing, this mic comes with a lifetime warranty... no other company can provide that!

John T.

54-815-111-0

Order No.	Description	Max Error		Sale Price
54-815-030-0	0 - 1.18"/0 - 30mm	0.00012"/0.003mm	Compare to Mitutoyo 293-676-20 @ \$549.00	\$486.90
54-815-030-C	1.18"/30mm with ISO/A2L	A Certification		490.70
54-815-060-0	1.18" - 2.6"/30 - 66mm	0.00016"/0.004mm		720.50
54-815-100-0	2.6" - 4.0"/66 - 102mm	0.00020"/0.005mm		1007.60
Set				
54-815-111-0	0 - 4"/0 - 102mm			2197.00
Bluetooth Mode	el			
54-815-130-0	0 - 1.18"/0 - 30mm	0.00012"/0.003mm		720.50
54-815-160-0	1.18" - 2.6"/30 - 66mm	0.00016"/0.004mm - <i>sp</i>	ecial order	953.40
54-815-110-0 Bluetooth Set	2.6" - 4.0"/66 - 102mm	0.00020"/0.005mm - <i>sp</i>	ecial order	1240.90
54-815-112-0	0 - 4"/0 - 102mm			2724.70
Connectivity Ca	ables/Accessory			
54-115-526-0	Proximity cable with USB ca	onnection		135.00
54-115-527-0	Proximity cable with serial of	connection		135.00
54-115-246-BT	USB Bluetooth receiver			45.80

You

FowlerVid



19



Order No.	Range	Accuracy		Sale Price
54-860-001-1	0 - 1"/0 - 25mm	± 0.00016"/0.004mm	Compare to INSIZE 310-25E @ \$139.00	\$114.30
54-860-002-1	1 - 2"/25 - 50mm	± 0.00016"/0.004mm		117.60
54-860-003-1	2 - 3"/50 - 75mm	± 0.0002"/0.005mm		128.30
54-860-004-1	3 - 4"/75 - 100mm	± 0.0002"/0.005mm		148.90
Set 54-860-103-1	0 - 3"/0 - 75mm Set			\$334.10

XTRA-VALUE I Electronic Micrometers

	54-870-001-0
Provider 0-1" 0.00005" FREE! Ball Attachment	 Resolution: 0.00005"/0.001mm Absolute & incremental modes Carbide measuring faces Ratchet thimble Automatic switch off Sizes over 1"/25mm include a calibration standard

Order No.	Range	Accuracy	List Price	Sale Price
54-870-001-0	0 - 1"/0 - 25mm	± 0.00016"/0.004mm	\$100.20	\$80.20
54-870-002-0	1 - 2"/25 - 50mm	± 0.00016"/0.004mm	108.20	86.60
54-870-003-0	2 - 3"/50 - 75mm	± 0.0002"/0.005mm	122.60	98.10
54-870-004-0 Set	3 - 4"/75 - 100mm	± 0.0002"/0.005mm	137.10	109.70
54-870-103-0	0 - 3"/0 - 75mm		\$295.20	\$236.20

20



- · Sizes over 1"/25mm include a calibration standard
- · Includes case

Order No.	Range		Sale Price
52-224-001-0	0 - 1"	Compare to Mitutoyo 193-211 @ \$121.17	\$105.50
52-224-002-0	1 - 2"		98.50
52-224-003-0	2 - 3"		112.20
52-224-004-0	3 - 4"		123.50
52-224-005-0	4 - 5"		130.70
52-224-006-0	5 - 6"		136.60
Sets			
52-224-103-0	0 - 3" set		\$296.00
52-224-104-0	0 - 4" set		419.70
52-224-220-0	0 - 75mm set		311.60

Outside Inch Micrometers

with Decimal Equivalents on Frame

52-224-103-0



TOOL-A-THON® 2020



- Graduation: 0.0001"
- · Anvil & spindle hardened and precision ground with microlap finish on carbide tips (0.00003" flatness)
- Spindle thread hardened, ground and lapped for ultimate accuracy
- Microfine graduations on satin chrome finish
- Positive locking lever
- Includes a wrench and case
- · Sizes over 1"/25mm include a calibration standard

Order No.	Range	Accuracy	Thimble	S	ale Price
52-240-001-1	0 - 1"	± 0.00015"	Friction	Compare to Brown & Sharpe 00180070 @ \$119.98	\$38.70
52-240-101-1	0 - 1"	± 0.00015"	Ratchet		38.70
52-240-002-1	1 - 2"	± 0.00015"	Friction		45.00
52-240-102-1	1 - 2"	± 0.00015"	Ratchet		45.00
52-240-003-1	2 - 3"	± 0.0002"	Ratchet		52.50
52-240-004-1	3 - 4"	± 0.0002"	Ratchet		58.60
52-240-005-1	4 - 5"	± 0.00025"	Ratchet		64.90
52-240-006-1	5 - 6"	± 0.00025"	Ratchet		71.10
52-240-007-1	6 - 7"	± 0.0003"	Ratchet		77.40
52-240-008-1	7 - 8"	± 0.0003"	Ratchet		91.00
52-240-009-1	8 - 9"	± 0.0003"	Ratchet		103.50
52-240-010-1	9 - 10"	± 0.0003"	Ratchet		117.30
52-240-011-1	10 - 11"	± 0.00035"	Ratchet		129.70
52-240-012-1	11 - 12"	± 0.00035"	Ratchet		142.20
Sets					
52-215-003-1	0 - 3" with	standards and fittee	d shop hardened	case	\$134.60
52-215-004-1	0 - 4" with	standards and fittee	d shop hardened	case	192.80
52-215-006-1	0 - 6" with	standards and fittee	d wooden case		327.30
52-215-012-1	0 - 12" with	n standards and fitte	ed wooden case		992.10
52-215-612-1	6 - 12" with	n standards and fitte	ed wooden case		654.50

0.001" Outside Micrometers



• Sizes over 1"/25mm include a calibration standard

Order No.	Range	Accuracy	Thimble	S	ale Price
52-253-001-1	0 - 1"	± 0.001"	Friction	Compare to Brown & Sharpe 599-1-44 @ \$117.90	\$32.50
52-253-101-1	0 - 1"	± 0.001"	Ratchet		32.50
52-253-002-1	1 - 2"	± 0.001"	Friction		38.70
52-253-102-1	1 - 2"	± 0.001"	Ratchet		38.70
52-253-003-1	2 - 3"	± 0.001"	Ratchet		45.00
52-253-004-1	3 - 4"	± 0.001"	Ratchet		52.50
52-253-005-1	4 - 5"	± 0.001"	Ratchet		58.60
52-253-006-1	5 - 6"	± 0.001"	Ratchet		64.90

0.001" Outside Micrometer Set



owler TOOL-A-THON* 2020

Prices & Specifications are subject to change without notice.

23

Find us on social media

G

Fowler

A.			52	2-219-001-1	
6	Fon	7ler e	• 60 • Pa • Pa • Pa • Ra • Si	raduation: 0.001" ³⁰ measuring anvils ainted enamel and heat insulated frame ositive spindle lock atchet thimble zes over 1"/25mm include a calibration andard	
Order No.	Range	Thread Range	Accuracy		ale Pric
52-219-001-1 52-219-002-1 52-219-003-1 52-219-004-1	0 - 1" 1 - 2" 2 - 3"	64 - 5 TPI/0.4 - 5mm 44 - 3.5 TPI/0.6 - 7mm 24 - 3.5 TPI/1 - 7mm 24 - 3.5 TPI/1 - 7mm		Compare to Mitutoyo 126-137 @ \$410.94	\$81.0 89.0 99.4 108.9
			1.2	licrometers	2

Order No.	Range	Thread Range	Accuracy	List Price	Sale Price
54-219-001-0	0 - 1"	64 - 5 TPI/0.4 - 5mm	± 0.00008"/0.002mm	\$240.00	\$216.00
54-219-002-0	1 - 2"	44 - 3.5 TPI/0.6 - 7mm	± 0.00008"/0.002mm	249.00	224.10
54-219-003-0	2 - 3"	24 - 3.5 TPI/1 - 7mm	± 0.00008"/0.002mm	265.00	238.50
54-219-004-0	3 - 4"	24 - 3.5 TPI/1 - 7mm	± 0.00012"/0.003mm	285.00	256.50

Friction thimble

54-219-001-0

· Painted enamel and heat insulated frame

IP65 rated for dust and coolant protection
Sizes over 1"/25mm include a calibration standard

Resolution: 0.00005"/0.001mm

True inch/metric conversion
60° measuring anvils
ABS/INC measuring mode
Positive spindle lock

Thread Measuring Wire Set

TES OF

- NOW includes wire holders
- 48 wires in 16 different, 3 wire sets

Sal

- Accuracy for sizes 0.018" through 0.108" is within +0/-0.0004"; sizes 0.120" through 0.185" is within +0/-0.0005"
- Measures all U.S. 60° threads from 3 48
 threads per inch

Order No. 52-485-048-0

9







Prices & Specifications are subject to change without notice.

0

0

Vernier Inch Blade Micrometers



- Use blade micrometers to measure the outside diameter of workpieces
 which have narrow grooves, "T" slots and other dimensions
- Anvil & spindle hardened & precision ground with microlap finish on ends
- Non-rotating spindle
- Ratchet thimble
- Blade thickness = 0.030"; blade width = 0.256"; blade penetration = 0.315"
- Sizes over 1" include a calibration standard

Order No.	Range	Graduation	Accuracy	List Price	Sale Price	
52-246-001-1	0 - 1"	0.0001"	0.00016"	\$220.90	\$176.80	
52-246-002-1	1 - 2"	0.0001"	0.00016"	240.50	192.40	
52-246-003-1	2 - 3"	0.0001"	0.0002"	251.10	200.90	
52-246-004-1	3 - 4"	0.0001"	0.0002"	255.90	204.80	


Electronic IP54 Blade Micrometers



Order No.	Range	List Price	Sale Price
54-860-241-0	0 - 1" Blade Anvil	\$272.60	\$218.10
54-860-242-0	1 - 2" Blade Anvil with standard	296.10	236.90
54-860-243-0	2 - 3" Blade Anvil with standard	309.30	247.50
54-860-244-0	3 - 4" Blade Anvil with standard	323.70	259.00

Prices & Specifications are subject to change without notice.

Find us on social media

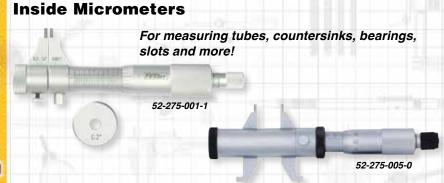

- Measuring faces are fully hardened, precision ground and microlapped finished to assure exceptionally accurate readings
- Spindle threads are hardened and ground
- · Microfine graduations 0.001" on a satin chrome finish permit easy reading
- Ratchet stop thimble assures exact and repetitive readings
- Includes a setting ring

Order No.	Range	Graduation	Accuracy	List Price	Sale Price
52-275-001-1	0.2" - 1.2"	0.001"	0.0002"	\$117.20	\$93.80
52-275-002-1	1" - 2"	0.001"	0.00024"	126.20	101.00
52-275-005-0	0.2" - 2.2"	0.001"	0.0002"	198.10	158.50

Inside Micrometers

for measuring large internal dimensions

- · Graduation: 0.001"
- Accuracy: 0.00005" x (3 + L"/2)
- Each set consists of an inside micrometer head and a series of fully hardened and lapped extension rods of different lengths all with carbide measuring faces
- Anvil and spindle are hardened and precision ground with microlap finish on ends
- Microfine graduations on satin chrome
- Positive locking nut on spindle
- · Quick, easy zero adjustment on the sleeve
- · Includes a wrench, case and reference standard

Order No.	Range	List Price	Sale Price
52-243-026-1	2 - 6"	\$144.10	\$115.30
52-243-212-1	2 - 12"	178.00	142.40
52-243-220-1	2 - 20"	230.70	184.60
52-243-240-1	2 - 40"	610.00	549.00
52-243-480-1	4 - 80"	1820.00	1638.00
52-243-512-1	4 - 120"	3120.00	2808.00
52-243-512-1	4 - 120"	3120.00	2



Micrometer Inspection Set

Fowler's setting master is quick, easy and extremely accurate. It comes with a certificate of calibration and a fitted aluminum case. Save time and money by calibrating your own measuring tools quickly and easily.

Set Includes:

- · Stand height: 12.5"
- 9 pc. Grade AS-0 gage block set (sizes: 0.625", 0.100", 0.125", 0.200", 0.250", 0.300", 0.500", 1.000" & 2.000"
- Certificate of calibration is traceable to NIST standards & provides the individual deviation of each block
- Optical flat (flatness: .000004"; Parallelism: 0.00002")
- · 4.0mm ball end T-handle hex wrench

Use blocks you already have, get the holder alone!

Order No.	Description	List Price	Sale Price
53-813-001-2	Complete Checking Set	\$351.50	\$281.20
53-813-002-0	Mic Checker without blocks	176.20	141.00

Micrometer Stands

3 styles to suit your space!





52-247-000-0

 Provides a measuring position and angle for outside micrometers and other instruments

52-247-005-0

- Unique locking nut adjusts micrometer stand to any position for perfect use and viewing
- · Stand folds for storage



52-247-010-0

- · Holds standard 0-12" micrometers firmly to metal surfaces
- Use at machine centers, work, assembly and inspection stations, steel tables and shelves
- V-bottom for mounting on cylindrical surfaces
- On/Off magnet switch
- Base is 2.30" L x 1.20" W x 3.50" H





Order No.	Description	List Price	Sale Price
52-247-000-0	Adjustable Micrometer Stand	\$61.00	\$48.80
52-247-005-0	Folding Micrometer Stand	40.90	32.80
52-247-010-0	Magnetic Micrometer Stand	70.00	63.00



Contact the Fowler Technical Department for special measuring applications

Order No.	Range	Includes	List Price	Sale Price
54-567-009-BT	0.080" - 0.250"/2 - 6mm (2-point heads)	5 heads, 1 handle, 3 rings	\$6322.70	\$5374.30
54-567-010-BT	0.250" - 0.375"/6- 10mm	2 heads, 1 handle, 1 ring	2479.20	2107.40
54-567-020-BT	0.375" - 0.750"/10 - 20mm	3 heads, 1 handle, 2 rings	2900.40	2465.40
54-567-050-BT	0.750" - 2" /20 - 50mm	3 heads, 1 handle, 2 rings	3745.00	3183.30
54-567-100-BT	2 - 4"/50 - 100mm	3 heads, 1 handle, 2 rings	4168.40	3543.20
54-567-105-BT	4 - 6"/100 - 150mm	2 heads, 1 handle, 1 ring	3745.00	3183.30
54-567-110-BT	6 - 8" /150 - 200mm	2 heads, 1 handle, 1 ring	4943.30	4201.90
54-567-200-BT	4 - 8" /100 - 200mm	4 heads, 1 handle, 2 rings	7824.30	6650.70
54-567-210-BT	0.750" - 4"/20 - 100mm	6 heads, 1 handle, 4 rings	6094.40	5180.30
54-567-620-BT	0.250" - 0.750"/76 - 20mm	5 heads, 1 handle, 3 rings	3456.70	2938.20
Connectivity Ca	bles/Accessory			
54-115-526-0	Proximity cable with USB connection		\$143.00	\$135.00
54-115-527-0	Proximity cable with serial connection		143.00	135.00
54-115-246-BT	USB bluetooth receiver		50.80	45.80



RS-232

DIRECT

PROXIMIT

INTERFACE



- Sets include setting rings
 - UKAS-certificates as standard with all setting rings
 - Depth stops available, call our technical department 1-800-788-2353

Order No.	Description	List Price	Sale Price
54-551-010-0	0.037" - 0.096"/0.95 - 2.45mm	\$3281.10	\$2953.00
54-551-011-0	0.060" - 0.167"/1.5 - 4.25mm	3211.20	2890.10
54-551-012-0	0.089" - 0.250"/2.25 - 6.35mm	3385.50	3047.00
54-551-013-0	0.242" - 0.405"/6.15 - 10.35mm	2979.50	2681.60
Connectivity Cables			
54-115-526-0	Proximity cable with USB connection	\$143.00	\$135.00
54-115-527-0	Proximity cable with serial connection	143.00	135.00

Bore Gage Setting Master Kits - Inch & Metric

Fowler's Bore Gage Setting Master Kit is used for accurately setting any 2-point bore gage up to 6"/150mm in diameter to an accuracy of 0.0001"/0.003mm

Each Set includes:

Setting Device (53-646-000-1 - Inch Model)

- Base anvil: 3.950" x 1.050"
- Adjustable anvil 2.375" x .375" (two each)
- Internal capacity: 6"/150mm
- Depth capacity: 1"/25mm
- Centralizer capacity width: 2.750"
- · Quick-release holder for fast adjustment
- Can also be used for external setting, depending on application (external mics, snap gages, caliper gages)

Economy Gage Block Sets

- Inch model:
- 36 piece
- Tolerances to .00005"
- Certificate of Calibration to NIST

Metric model:

- 33 piece
- AS-2 grade
- Certificate of Calibration to NIST



Instructional video available at youtube.com/FowlerVid

53-646-000-1 Bore gage shown not included

Includes: Bore gage setting master and gage block set. All in a custom-fitted case!

Order No.	Description	List Price	Sale Price
53-646-000-1	Inch Bore Gage Setting Master Kit	\$350.00	\$315.00
53-646-010-0	Metric Bore Gage Setting Master Kit	332.30	265.90



Dial Bore Gage Sets with Carbide Anvils

- · Easy to set and read
- · Graduation: 0.0005", 0.0001" or 0.01mm
- · 2-point measuring system
- Insulated grip
- 9.5" measuring depth
- · Chrome plated handle
- Economical
- · Includes fitted case





XTENDER


52-646-400-0

175 X X X	C	_		_
Order No.	Range	Graduation	S.	ale Price
52-646-100-0	0.7 - 1.5"	0.0005"		\$142.40
52-646-300-0	2 - 6"	0.0005"		117.80
52-646-400-0	1.4 - 6"	0.0005"	Compare to Mitutoyo 511-753 @ \$304.68	179.00
52-646-500-0	1.4 - 6"	0.0001"		224.20
52-646-220-0	35 - 160mm	0.01mm		197.70

XTENDER Electronic Bore Gage Set with Carbide Anvils

Industry's two most popular bore gage ranges combined in one easy-to-use electronic set!

Preset size of master for absolute reading and use minimum hold feature to lock on the bore size as the gage is rocked in the part to be measured.





Prices & Specifications are subject to change without notice.

ind us on social media

Fowler - Sylvac Hi Cal Electronic Height Gages

- Extra low measuring force, from 0.2N
- · Measure internal and external diameters, centerlines, heights, widths, depths and MIN/MAX/TIR capability
- · Excellent repeatability thanks to the motorized carriage
- High reliability
- Data output USB and RS232
- · Battery life: 40 hours rechargeable during operation
- · Touch sensitive probe speed for easy operation
- · Base with small footprint
- · Includes: protective cover, charging set, ruby ball probe Ø3mm, setting gage and calibration certificate



Contact the Fowler Sales Department 1-800-788-2353

Accessory Probe Sets

54-931-150-0



0

\$







54-930-217-0

1mm Ball Probe with

54-930-215-0

Hi.Cal 150

der No.	
-931-150)-(
-931-150)-(
-931-300)-(
-931-300)-(
-931-450)-(
-931-450)-(
cessori	es
-930-215	5-0
-930-217	
	-931-150 -931-150 -931-300 -931-300 -931-450 -931-450 :cessori -930-215

Range 6"/150mm 6"/150mm with ISO/A2LA Certification 12"/300mm 12"/300mm with ISO/A2LA Certification 17.5"/450mm 17.5"/450mm with ISO/A2LA Certification Full Probe Accessory Set Basic Probe Accessory Set

32



FREE Basic Probe Set with 54-931-450-0 Hi Cal Purchase \$623.80 Value!

Hi-Cal 300

54-931-450-0

0

S

6"/150mm & 12"/300mm Hi_Cal Purchase

	Accuracy	List Price	Sale Price
18	0.00013"/0.0034mm	\$4898.40	\$4408.60
			4633.60
	0.00016"/0.0042mm	5629.20	5066.30
			5381.30
	0.00020"/0.005mm	6354.00	5718.60
			6033.60
		\$1350.00	\$1215.00
		750.00	675.00

Prices & Specifications are subject to change without notice.

Find us on social media

V-Series Special Pricing!

Fowler - Trimos V3, V4 & V5 Electronic Height Gages

The Fowler-Trimos V3, V4 and V5 vertical measuring instruments have been developed for the most difficult workshop environments. Manufactured entirely in Switzerland, they guarantee a robust, precise and reliable product in the long run.

- "Black mask" display with user friendly functions
- Electronically adjustable measuring force 0.75/1.5 (N)
- Lithium-ion rechargeable batteries
- All adjustments possible without tools
- · Cast iron base for optimal stability
- · RS232 and USB interfaces requires 54-192-112-0 cable
- · Dual probe holders (V4 and V5 Only)
- · Carriage displacement: Manual
- (V5 includes selectable manual or motorized carriage displacement)
- · Measures heights, diameters, perpendicularity, centerlines, Min/Max/Delta
- Resolution: 0.00005"/0.001mm
- · Repeatability (2s): 0.00008"/0.002mm (Ø 0.00016"/0.004mm)

All V Models Include:

- · Charging unit
- Measuring insert with ruby ball Ø4mm
- Probe holder elbow Ø 8mm
- Setting gage
- User's manual and test certificate
- Free Swiss Knife & Fowler Hat with Any V3, V4 & V5 purchase!

	V3	54-192-340-0	54-192-370-0
	Measuring Range	16"/407mm	28"/711mm
	Range with Probe inverted	20"/508mm	31.9"/812mm
1	Max. Permissible Errors	0.00028"/0.007mm	0.00032"/0.008mm
1	Frontal Squareness Deviation	0.0004"/0.010mm	0.0006"/0.015mm
	Air Cushion	NO	
Ľ			

V4
Measuring Range
Range with Probe inverted
Max. Permissible Errors
Frontal Squareness Deviation
Air Cushion

54-191-440-0 16"/407mm 28.3"/719mm 0.0002"/0.005mm 0.0004"/0.010mm YES

54-199-540-0

16"/407mm

28.3"/719mm

54-191-470-0 28"/711mm 40.2"/1023mm 0.00028"/0.007mm 0.0006"/0.015mm

54-199-570-0

28"/711mm 40.2"/1023mm



TRIMOS



Order No.	Description	Range	List Price	Sale Price
54-192-340-0	V3 Height Gage	16"/407mm	\$4588.50	\$4129.70
54-192-370-0	V3 Height Gage	28"/711mm	5059.00	4553.10
54-191-440-0	V4 Height Gage	16"/407mm	6044.10	5439.70
54-191-470-0	V4 Height Gage	28"/711mm	7031.20	6328.10
54-199-540-0	V5 Height Gage	16"/407mm	6661.40	5995.30
54-199-570-0	V5 Height Gage	28"/711mm	7894.00	7104.60
Probe Sets				
54-199-105-0	4mm Probe Set, 21 piece		\$1765.30	\$1588.80
54-199-106-0	8mm Probe Set, 16 piece		1317.30	1200.00
54-199-107-0	Economy Probe Set, 7 piece		467.70	450.00
Accessories				
54-199-400-0	12"/300mm Holder - for 8mm probes Vmux software - for connecting multiple units to one PC		\$988.20	\$889.40
54-777-120-0			465.50	395.00
54-199-022-BT	Bluetooth module (V4 and V5 only)		509.70	458.80

2.5 + L(mm)/300

YES

0.0002"/0.005mm0.00032"/.008mm

V5

Measuring Range

Air Cushion

Range with Probe inverted

Max. Permissible Errors (µm)

Frontal Squareness Deviation



<u>7-HEIGHT</u> *Electronic* Height Gages

- GSIGN!
- NEW base design with painted enamel finish has a more comfortable grip and is finely ground and lapped for smooth movement on surface plates
- NEW fine adjust feature allows precise adjustment to required settings
- NEW preset feature allows setting pre-determined or reference measurements
- NEW 2 indicator holding bars included (3/8" and 8mm)
- Direct inch/metric conversion
- Resolution 0.0005"/0.01mm
- Floating zero
- · Large, high contrast LCD display
- · Coarse adjustment hand wheel
- Carriage locking lever
- · Carbide tipped scriber



54-175-024-0

54-175-012-1

Order No.	Range	Accuracy	Sale Price
54-175-012-0	12"/300mm	± 0.0015"/0.04mm	\$477.00
54-175-018-0	18"/500mm	± 0.002"/0.05mm	556.00
54-175-024-0	24"/600mm	± 0.002"/0.05mm	Compare to Mitutoyo 625.80
			570-211 @ \$992 52

7-HEIGHT { ABS PLUS+

Electronic Height Gages with Wireless Capability

NEW Design ABS measuring system

- Supplied with a NIST certified test block (1" x 2" x 3")
- Includes indicator holding bar (3/8" and 8mm)
- Supplied with mini USB data cable
- · Heavy duty single column design
- · Carbide scriber
- · Ground and lapped base for smooth movement
- · Steel rack with large hand wheel for coarse and fine adjustment
- · Positive locking level for scribing
- · Can be used with wireless transmitter (54-115-100-0)

F	
	Ð
	Ň
	Š
	Q.
	ц

Order No.	Range	Accuracy	List Price	Sale Price
54-175-012-1	12"/300mm	± 0.002"/0.05mm	\$607.80	\$547.10
54-175-024-1	24"/600mm	± 0.002"/0.05mm	822.10	739.90
Accessory				
54-115-100-0	Wireless trans	mitter	\$111.90	\$100.00

Twin Beam Dial Height Gages

A must for every shop!

- Separate digit counters register both upward & downward travel
- Zero setting can be obtained throughout the gage's range
- Coarse readings in 0.100" graduations: fine readings taken on indicator are 0.001"
- Dual chrome plated beams
- Carbide-tipped scriber.
- Base is hardened, ground & lapped for maximum flatness




Order No.	Range	Accuracy		Sale Price
52-174-212-0	12"/300mm	± 0.0015"/0.04mm		\$269.60
52-174-224-0	24"/600mm		Compare to Mitutoyo 92-152 @ \$1,329.99	449.30

Twin Beam Electronic Height Gages with Offset Scriber

Updated electronic and mechanical design with offset scriber offers better accuracy and movement of carriage

- Base is ground and lapped for flatness
- Handwheel provides course and fine movement
- · Carbide tipped scriber
- Functions include preset, in/mm conversion and ABS/INC for direct or comparative measuring

54-174-212-3



Prices & Specifications are subject to change without notice.

Find us on social media

Tool Presetter

For checking of heights and diameters (radii) of various tools by using a fixed, precise, steel column (Z axis) and a constant measuring force measuring arm (X axis).

Tool Holding Spindle

Tool presetter is supplied with high precision ball cage bearing (Grade 0). High precision spindle has: • Less than 2 μ m concentricity error



Display

- Resolution: 0.00005"/0.001mm
- MIN/MAX functions for TIR readings
- 2 reference indications for measurement comparison
- Function for PRESET value and TOLERANCE value inputs
- Tolerance mode indication for upper and lower values
- · Radius or diameter indication on X-axis display
- · Display hold to retain readings
- Output OPTO RS232 for each axis available
- · Floating zero function anywhere within axis range
- · Carbide measuring insert for durability
- Accepts measuring probes with 8mm shank for unique applications

Additional Features

- · Counter balanced measuring carriage
- Constant measuring force of horizontal measuring arm ensures high accuracy
- High precision Sylvac measuring system



Fowler



Height Measurement



Diameter/Radius Measurements



Checking of a Runout

Order No.	Description	List Price	Sale Price
54-188-300-0	Tool Presetter	\$10,049.50	\$9350.00
54-121-000-0	ISO 50/45 Tool Pot Adaptor	1131.20	
54-121-005-0	ISO 50/40 Tool Pot Adaptor	772.40	
54-121-010-0	ISO 50/35 Tool Pot Adaptor	1131.20	
54-121-015-0	ISO 50/30 Tool Pot Adaptor	878.70	
54-188-333-0	ISO 50 Setting Gage	568.00	
54-188-335-0	ISO 40 Setting Gage	1136.10	



The X-Pro Portable Roughness Tester II can be used for many applications by selecting from a variety of accessories, including:

- Stand with swivel
- · A variety of probes

RS232 is available on certain models (contact the Fowler Technical Department for more information 1-800-788-2353)

(X-Pro shown with optional stand with swivel)

X-Pro Portable Roughness Tester II

Order No.	Description	Sale Price
54-410-500-0	Portable Surface Roughness Tester 0.0004" probe (NIST specifications)	
	Compare to MAHR EMD-1500-311 @ \$2113.74	\$1666.70
54-410-600-0	Portable Surface Roughness Tester 0.0002" probe (DIN specifications)	
	Compare to MAHR EMD-1500-311 @ \$2113.74	1666.70

X-Pro Portable Roughness Tester II Stand with Swivel

Order No.	Description	Sale Price
54-400-896-0	Stand with Swivel Attachment	\$441.00

X-Pro Portable Roughness Tester II Probes and Accessories

Order No.	Description	Resolution	Sale Price
54-400-319-0	General Purpose Probe	0.0004"	\$720.00
54-400-326-0	General Purpose Probe	0.0002"	720.00
54-420-321-0	Small Bore Probe	0.0004"	778.50
54-420-327-0	Small Bore Probe	0.0002"	778.50
54-420-301-0	Traverse Chisel Probe	0.0004"	778.50
54-420-302-0	Parallel Chisel Probe	0.0004"	778.50
54-420-328-0	Groove Bottom Probe	0.0004"	778.50
54-420-120-0	AC Adapter Kit		61.40

Find us on social media

Prices & Specifications are subject to change without notice.

X-PROOF Water Resistant Indicator Set



Magnetic Base (52-585-010-0):

Fine adjustment

- · Base dimensions: 2" x 2-11/32" x 1-13/16"
- · Also mounts test indicators with 1/4" post
- 85 lb. pull
- On-Off lever release magnet
- · V-base for placing on round surfaces

X -Proof Indicator (52-520-450-0):

- Travel: 1"
- · Reading: 0.001"
- Continuous reading: 0 100
- Tolerance markers
- · AGD Group 2, 2-1/4" dia.
- · Lugback and carbide point
- · Robust, shockproof design
- Rubber bellows on stem
- · O-ring seal on safety cap
- · O-ring protection for bezel and rotating dial
- Sealed back plate



List \$92.00

Order No. 52-585-155-0





with X-PROOF Indicator

Flex Arm Mag Base:

- · Corrosion resistant chrome plated flex arm
- 85 lb. pull magnet
- · Holds rigidly in almost any position
- V-base for mounting on rounded surfaces

Magnetic Indicator Back:

- Use for positioning the indicator on most metal surfaces
- Protective coating

X-Proof IP54 Indicator:

- · Robust, shockproof design
- Travel: 1"
- · Reading: 0.001"
- · Continuous reading: 0 100
- Tolerance markers
- · AGD Group 2, 2-1/4" dia.
- · Lugback and carbide point

Protection Includes:

- Rubber bellows on stem
- · O-ring seal on safety cap
- O-ring protection for bezel and rotating dial
- · Sealed back plate

Order No.	Description	Dial Color	List Price	Sale Price
52-585-450-0	Chrome Flex Mag and X-Proof Indicator Set	White	\$200.70	\$160.60
52-585-455-0	Chrome Flex Mag and X-Proof Indicator Set	Black	207.00	160.60

Prices & Specifications are subject to change without notice.

Included Magnetic Indicator Back for mounting to most

metal surfaces!







Magnetic Base and Dial Indicator Combo

- Includes 1" indicator and mag base, rods, swivel clamps and case
- The 2-1/4" diameter 0.001" indicator features: satin chrome finish, tolerance hands, lug back and revolution counter
- The 6" high mag base features a 1.5" x 1.5" x 1.75" 50 lb. pull base and a 4.5" long sidearm. All exposed metal is finished in anodized black for corrosion resistance.
- Includes shop-hardened case

Order No. 52-522-101-0





52-585-	150-0
---------	-------

AGD Indicator:

- 1" travel
- Continuous reading: 0-100
- AGD group 2, 2-1/4" dial diameter
- Tolerance markers
- · Carbide tipped point

Articulating	Mag	Base:
--------------	-----	-------

- Fine adjust
- 85 lb. pull
- V-slot on base for mounting on rounded surfaces

54-585-250-0

List \$116.40

INCH • METRIC • FRACTION

Indi-X blue FRACTION Electronic Indicator

- Auto Off feature
- · 2-1/4" dial face
- Lugback and 3/8" stem mountings
- Resolution
- 0.0005"/0.01mm/64ths
- Tolerance indicators
- Absolute/incremental reading
- Carbide tipped point

Ourlas No.	Desculation	Link Dulas	Only Dulas	
Order No.	Description	List Price	Sale Price	1.11
52-585-150-0	Articulating Mag Base and AGD Indicator Set	\$183.90	\$147.20	E
54-585-250-0	Articulating Mag Base and Indi-X Blue Set	206.50	165.20	1
52-520-110-0	AGD Indicator ONLY	72.90	60.00	
54-520-260-0	Indi-X Blue Indicator ONLY	113.80	102.50	1
52-585-008-0	Articulating Mag Base ONLY	106.80	85.50	

owler TOOL-A-THON* 202(

Find us on social media



X-DEPTH 22 🗧 0 - 22" Electronic Depth Gage 0 - 1" travel electronic indicator



- Resolution 0.0005"/0.01mm
- Zero reset at any position
- Relative/absolute measuring
- Bottom surface of the base is hardened, ground and lapped • Full 22" range
- Hold feature
- 4" Base
- Includes 2 extra points for small hole applications; one 0.078" dia. x 1" long and one needle point x 1" lona

Order No. 54-125-777-0 24.6 2 List \$273.80 -DEPTH 22 0 - 22" Dial Depth Gages Twice the range of competitive products! 0 - 1" travel dial indicator Rods connect together for full 22" capacity Includes 2 extra points for small hole 52-125-006-1 applications; one 0.078" dia. x 1" long inch/metric model and one needle point x 1" long 52-125-008-0 Graduation Accuracy List Price Sale Price Range ± 0.001 \$203.20 0 - 22 \$182.90 0.001




Premium Depth Micrometers

- Clear microfine graduations on satin chrome finish
- Base constructed of hardened tool steel and is precision ground and microlapped
- Quick and easy zero adjustment
- Rods hardened, ground and lapped on measuring surfaces and adjustable in either direction
- Interchangeable rods are fitted to the micrometer spindle against a positive stop and locked
- Ratchet thimble
- Threads hardened, ground and lapped for accuracy
- Includes spanner wrench and fitted case

52-225-011-1

Order No.	Range	Graduation	Accuracy	Base Size	List Price	Sale Price
52-225-006-1	0 - 4"	0.001"	0.0002"	2.5"	\$199.40	\$159.60
52-225-011-1	0 - 4"	0.001"	0.0002"	4"	199.40	159.60
52-225-015-1	0 - 6"	0.001"	0.0002"	4"	227.20	181.80
52-225-020-1	0 - 6"	0.001"	0.0002"	2.5"	218.90	175.20
52-225-030-1	0 - 12"	0.001"	0.00028"	2.5"	339.30	271.50
52-225-035-1	0 - 12"	0.001"	0.00028"	4"	354.50	283.60

Digit Counter Depth Micrometers

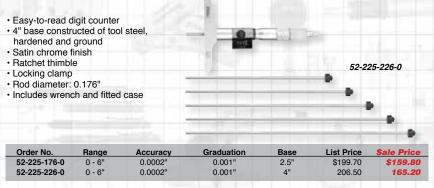

IP54 Electronic Depth Micrometer



Prices & Specifications are subject to change without notice.

ind us on social media

0 - 12"/300mm Light-Line Digital Depth Gage

- · Accuracy: 0.0015"/0.04mm
- Beam made of oxide coated aluminum with double inner prismatic guide ways
- · Bases made of hard anodized aluminum
- Includes three base attachments: 150/300/450mm length
- · Includes two contact points (ball and offset)

Electronics feature on/off, floating zero and direct in/mm conversion

0.0005"/0.01mm resolution and repeatability

Lightweight!

Order No. 54-136-012-0

 Includes a fitted case, instructions, 2 spare base screws, 2 hex wrenches and test certificate



Light-Line Digital Depth Gages with adjustable base

- Adjustable base can be mounted in 3 different locations for offset applications
- · Light weight beam made of oxide coated aluminum
- · Bases made of hard anodized aluminum
- Includes 1 base attachment 350mm (14")
- · Includes two contact points (1 ball and 1 disk)
- Electronics feature on/off, floating zero and direct in/mm conversion
- 0.0005"/0.01mm resolution and repeatability
- Includes fitted case, instructions, 2 base screws, hex wrench and test certificate



Measures Internal Grooves

List \$493.10



54-136-512-0

Measures depths, counter bores, steps, grooves and more!

 Order No.
 Range
 Accuracy
 List Price
 Sale Price

 54-136-512-0
 0 - 12"/300mm
 0.0015"//0.04mm
 \$686.00
 \$617.40

 54-136-535-0
 0 - 31"/800mm
 0.0024"/0.06mm
 1500.60
 1200.50



	liper Gages			0 <u>9</u> 16	000
CLIMP DOWN	ULUUU				9
54-554-611-0		5	4-554-711-0	A-THO	Ľ
ccuracy: ± 0.0008"/± 0.02 Resolution: 0.0002"/0.005n Rugged housing arge, LCD display	mm • Preset capability • Absolute/Incrementa • High-impact, aircraft			T SELLER!	OOL ATTOM
	Dimensions for Interr Metric Inch	nal Calipers	S H	Tip Radius	5
╺ ────────────────────────────────────	Intellic Intellic 5-15mm 0.2-0. 5-25mm 0.2-1. 10-30mm 0.41. 20-40mm 0.8-1. 30-50mm 1.2-2.	.0" 35mm .2" 55mm .6" 80mm	1.0mm 1.5mm 1mm 1.5mm 2mm 3.5mm 3mm 6.5mm 3mm 8.5mm	0.3mm 0.3mm 0.5mm 0.5mm 0.5mm	
	Dimensions for Exter	rnal Calipers			
	Metric Inch 0-10mm 0-0.4' 0-20mm 0-0.8' 10-30mm 0.41. 20-40mm 0.8-1. 30-50mm 1.2-2.	L " 40mm " 80mm .2" 80mm .6" 80mm	S H 3mm 8mm 6.5mm 25mm 6.5mm 25mm 6.5mm 25mm 6.5mm 25mm 6.5mm 25mm	Tip Radius 0.5mm 0.75mm 0.75mm 0.75mm 0.75mm 0.75mm	
ternal Caliper Gages rder No.	Panga		List Briss	Sala Driag	
4-554-611-0	Range 0.200" - 0.590"/5 - 15mr	m	List Price \$193.80	<u>Sale Price</u> \$174.50	
1-554-622-0	0.200" - 1"/5 - 25mm		207.80	187.10	
4-554-623-0 4-554-624-0	0.400" - 1.2"/10 - 30mm 0.790" - 1.6"/20 - 40mm		217.50 217.50	195.80 195.80	
1-554-625-0	1.2" - 2"/30 - 50mm		217.50	195.80	
ternal Caliper Gages					
rder No.	Range		List Price	Sale Price	
4-554-711-0 4-554-722-0	0 - 0.400"/0 - 10mm 0 - 0.790"/0 - 20mm		\$193.80 207.80	\$174.50 187.10	
4-554-723-0	0.4" - 1.2"/10 - 30mm		217.50	195.80	
	0.790" - 1.6"/20 - 40mm 1.2" - 2"/30 - 50mm	1	217.50 217.50	195.80 195.80	
4-554-725-0	UE Internal Electron	& Ext ic Cal	ernal iper Gag	jes	
1-554-725-0	UE Internal Electron	ic Cal	ernal iper Gag	ти	
4-554-725-0	UE Electron	nic Cal	iper Gag	/0.3mm/1/64ths 0.1mm/1/64ths I lay 2	
1-554-725-0 TRA-VAL	UE Electron	nic Cal	Accuracy: 0.01" Reading: 0.01"/ Robust housing Large LCD disp Battery: CR203	/0.3mm/1/64ths 0.1mm/1/64ths I lay 2	
1-554-725-0 TRA-VAL	UE Electron	nic Cal	Accuracy: 0.01" Reading: 0.01"/ Robust housing Large LCD disp Battery: CR203 Spring loaded w	/0.3mm/1/64ths 0.1mm/1/64ths lay 2 vith locking nut	
4-554-725-0 TRA-VAL 54-554-630-0 54-554-730-0 rder No. Description	UE Electron	nic Cal	Accuracy: 0.01" Reading: 0.01"/ Robust housing Large LCD disp Battery: CR203 Spring loaded w	V0.3mm/1/64ths 0.1mm/1/64ths lay 2 vith locking nut ing Master	
54-554-630-0	UC Electron	ic Cal us out! Tube rVid	Accuracy: 0.01" Reading: 0.01"/ Robust housing Large LCD disp Battery: CR203 Spring loaded w	V0.3mm/1/64ths 0.1mm/1/64ths lay 2 vith locking nut ing Master	





Order No.	Description	List Price	Sale Price
54-440-740-1	4" Digi-Pro Electronic Protractor	\$93.00	\$83.00
54-440-775-1	12" Digi-Pro Electronic Protractor	111.50	99.00

Universal Electronic Protractor

- Accuracy: ± 5 minutes
- Resolution: 30 seconds
- Hardened stainless steel
- Range selection: 1 x 360°, 2 x 180°, 4 x 90°
- Dual reading LCD display arc minutes/decimal degrees
- Preset function
- · 6" and 12" blades and acute angle attachment included
- Fine adjustment
- Measuring range: 0 360°

Order No. 54-440-750-0



Find us on social media

Prices & Specifications are subject to change without notice.

- Tolerances to ± 0.00005"
- 36 pieces
- Manufactured to meet N.I.S.T. Federal Specification ASME
- B89. 1.9 2002 tolerances on length for inch gage blocks
- Certificate of Calibration traceable to N.I.S.T.
- In high-quality fitted wood case

Order No. 53-672-036-1



List \$324.90

Grade Ø Rectangular Steel Gage Block Sets

- Grade Ø
- Certificate of Calibration traceable to N.I.S.T.
- Each block is individually serialized
- · Sizes clearly marked on each block
- Complete with fitted wooden case

A better grade for finer work!



53-670-038-0

Order No.	Description	List Price	Sale Price
53-670-038-0	36 piece Grade Ø Rectangular Gage Block Set	\$494.20	\$395.00
53-670-080-0	81 piece Grade Ø Rectangular Gage Block Set	909.40	725.00

8 Piece Gage Block Set



- Fowler's long gage blocks are rectangular in shape, Grade Ø and supplied with an NIST certificate
- Stackable using holding clamps

53-670-008-0

 Order No.
 Description
 List Price
 Sale Price

 53-670-008-0
 8 piece Gage Block Set
 \$2595.00
 \$2335.00

 53-670-777-0
 Holding Clamp for two or more large blocks
 104.70
 82.00

QUICK CHECK Multi-Function Check Standard



Check

- 🗸 Height Gages
- ✓ Micrometers
- ✓ Depth Gages
- $\sqrt{}$ Bore Gages
- ✓ Test & Dial Indicators
- ✓ Caliper Gages
- ✓ Protractors & more



- Accuracy of indicated values ± 0.003mm
 All sizes marked are actual
- One compact, multi-function, precise standard
 Can be used to check and verify a multitude of
- measuring instruments

 Supplied with a manufacturer's test certificate and fitted wood case

Order No. 53-813-015-0



Large Square Gage Blocks

- Grade Ø
- NIST Traceable
- · Vertically more stable then rectangular blocks
- · Large sizes help eliminate block stacks
- Meets or exceeds Federal Specification ASME B89.1.9-2002

Order No.	Description	List Price	Sale Price	2
53-676-216-0	5" Large Square Gage Block	\$285.00	\$256.50	
53-676-218-0	6" Large Square Gage Block	355.00	319.50	
53-676-220-0	7" Large Square Gage Block	420.00	378.00	1
53-676-222-0	8" Large Square Gage Block	470.00	423.00	
53-676-224-0	10" Large Square Gage Block	645.00	580.50	
53-676-226-0	12" Large Square Gage Block	745.00	670.50	
53-676-228-0	16" Large Square Gage Block	1030.00	927.00	E
53-676-230-0	20" Large Square Gage Block	1650.00	1485.00	- 5

2 Dimensional Coaxial Indicator Set - Inch

SELLER!

Use the 2D Coaxial Set for accurate component centering and positioning in most machining applications. The dial remains stationary during the rotation of the machine spindle.

USERIES

- 1.6"/42.5mm diameter dial
- Graduations 0.0005"/0.01mm · Repeatability to within 0.0002" (0.005mm) of true center
- · 3 Internal and 3 External feelers
- Center point feeler
- Restraining arm

Specifications:

- Length: 6-7/8" (175mm)
- Shank: 3/8" dia. x 7/8" (10mm x 20mm) long
 Feeler ball: 1/8" (3mm) dia.

Dial readings: 0-50

TOOL-A-THON[®] Check us out! For Instructional and Training videos,

subscribe to FowlerVid

3()

- Measuring range: 0.250" (6mm) axis offset
- Speed—recommended not to exceed approx. 800 RPM
- · Capacity depends on feelers installed, but overall range is 5/32-12" (4-300mm) internal diameter; 0-12" (0-300mm) external diameter

Order No. 52-710-025-0

Compare to Blake COA-850 @ \$399.95

2", 3", 4" and 6" Steel Square Set

<u>\$</u>4



· Made of the finest carbon tool steel, these squares have true right angles both inside and outside

60

- · Beams and blades ground and lapped for straightness and parallelism
- Hardened blade

310-

- · Beam grooved at inner corner for clearance of burrs and dirt
- Squareness of blade edge to the working face: 2" & 3" = ± 0.0006", 4" & 6" = ± 0.0008"

52-750-006-0

Order No. 52-432-246-0



List \$90.30

52-750-012-0

Cylindrical Squares

- · Used for checking squares, height gages and other instruments
- · Hardened and the ends are lapped to 90° angular accuracy
- 6" cylindrical squares: ± 0.0001"
- 12" cylindrical square: ± 0.00015"
- Includes handle and wood case





•	Bevele	ed	edge	with	1/64th	graduations
	• • •					

- Satin chrome finish on scale
- Hardened steel
- 0.21" thick, 1.59" wide
- Storage sleeve included

52-480-070-0

Order No.	Description	Straightness	List Price	Sale Price
52-480-065-0	6"	0.0015"	\$26.00	\$20.80
52-480-070-0	8"	0.0015"	31.00	24.80
52-480-075-0	12"	0.0015"	44.00	35.20
52-480-080-0	24"	0.0025"	67.00	53.60

Combination Square

- · Blades are chrome plated, fully hardened and tempered
- · Includes square, protractor and center head with 12" blade
- · Square head has level and scriber point
- Double indexed protractor is graduated 180° in both directions
- · Graduated in 8ths, 16ths, 32nds and 64ths

Order No. 52-370-012-0

Compare to Starrett 434-12-4R @ \$297.69

Carbide Super Scriber

	Comments of the owner				
Lightweight	Retractable carbide tip	Knurled grip	Machined alumi	inum body	Pocket clip
Order No	Description	Overall	Longth	List Driss	Sala Prico

72_00

Order No.	Description	Overall Length	List Price	Sale Price
52-500-050-0	Carbide Super Scriber	6.5"	\$36.10	\$32.50
52-500-055-0	Carbide Refill		11.10	10.00

Screwdriver Kit

- This precision Screwdriver and Tool Set is ideal for miniature work
- Features knurled and chromed swiveling handles
- Screwdriver and Tool Set contains 9 screwdrivers, 1 tapered point scratch awl and 1 magnetic pick-up tool
- Screwdriver size range: #00, #0, #1, 1/32", 3/64"
 1/16", 5/64", 3/32" and 1/8"

Order No. 52-490-003-0



List \$30.00

1/8" Parallel Set

- · Made from high-grade alloy steel, hardened and ground from 1/8" stock with 2 holes in each parallel
- · 10 pairs, 6" length, 1/8" width
- 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2" & 1-5/8" · Height specifications relate to consistency within each pair. Absolute heights are nominal.
- Parallelism: ± 0.0002"
- Hardness 58 63 HRC
- Paired in height: ± 0.001"



Order No. 52-437-000-0



List \$245.50

1-2-3 & 2-3-4 Blocks

- · 23 holes for easy clamping
- · Sold in pairs
- · Hardened 56 60 HRC
- · Useful in layout, machine setup, grinding work and inspection
- · Features 5 threaded holes for
- joining and setup



52-439-234-0

Order No.	Description	Accuracy	List Price	Sale Price
52-439-031-0	1-2-3 Blocks	± 0.0001"/1"	\$96.20	\$77.00
52-439-234-0	2-3-4 Blocks	± 0.0001"/1"	110.00	92.00

Planer and Shaper Gage adjustable setup tool

· 1/4" to 6-1/4" range

- Base size 3/4" x 5"
- · Extensions 1" and 3"
- · Base and slide are beveled to provide accurate alignment and parallelism
- Base and slide are hardened
- · Supplied with 1" and 3" extension posts, maximum height 6-1/4"
- Precision level ensures accuracy
- · Platform has extra tapped holes to accommodate post for dial indicators and other accessories • Fitted wood case

List \$209.20



52

Prices & Specifications are subject to change without notice.

\$**167.**40

X-BLOX V-Block Set

2 each @:

- Dimensions: 1-1/2" L x 1-1/4" W x 1-1/4" H
- · Work capacity: Approximately 1"
- 2 each @:
- Dimensions: 2" L x 1-1/2" W x 1-1/2" H

Sale

Work capacity: 1-1/2"

All feature:

- Surfaces are square and parallel within 0.0005"
- · V-grooves are square and parallel with all surfaces within 0.0005"
- · Corresponding dimensions for each pair are alike within 0.0005"

Order No. 52-475-500-0

"You will not go wrong buying this product "

.I R

List \$137.80

V-Block Set

Accuracy: 0.0004"

\$124,10

- Height: 2". Length:, 2-3/4". Width: 2"
- . Two clamps, with screw hole at 90 degrees for positive clamping of work, are included.
- Clamping capacity= 2"(50mm)
- V-Blocks are constructed with stepped grooves which allow the clamps to be inserted without protrusion, thus allowing V-Blocks to be used on base, ends or sides.
- Hardened steel. All sides of V-Blocks precision ground parallel and square within .0004".
- Matched pair of V-Blocks are perfectly aligned with 90 degree V-grooves ground central and parallel to the sides and base

List \$251.30

Order No. 52-475-555-0

\$201,10 Sale

All-Angle V-Block

- · For grinding, milling, drilling and inspection
- · Made of hardened and precision ground tool steel
- · Sides are parallel and vee is central and ground to 0.0003"
- · Central hole is provided for drilling or removing pins.
- V-Block has four 3/8" 16 tapped holes, two in the bottom and one on each side for angle non-clamping
- Dimensions: 3-5/8" long x 1-7/8" wide x 1-7/8" high (including clamp)
- · Holding capacity: 1-5/16"

Order No. 52-475-050-0



List \$95.00



Find us on social media

American Made Tools!



Terestand southers Tereston

Back



52-330-012-1

America Rules

- Made in the USA
- Available in 4R, 5R and IN/MM graduations

EZ-Read High Contrast Rules

- · Hardened stainless steel · White, microfine graduations against a black background provide a non-glare finish which
 - is extremely easy-to-read

Satin Chrome Rules

- Tempered steel
- · Non-glare satin chrome finish
- Sharp easy-to-read graduations

GRADUATIONS

4R: 8ths, 16ths, 32nds, 64ths 5R: 32nds, 64ths, 10ths, 100ths IN/MM: 32nds, 64ths, 0.5mm, 1mm

Golden Rules

- Titanium finish = RC80 for superior wear resistance on flat surfaces
- 30% harder finish then standard chrome rules

RIGID STEEL RULES

Order No.	Finish	Size	Reading	Sale Price	e
52-307-006-1	Black	6"	5R	\$22.8	D
52-307-012-1	Black	12"	5R	36.40	D
52-330-006-1	Satin Chrome	6"	4R	22.80	D
52-330-012-1	Satin Chrome	12"	4R	Compare to Starrett C304SRE-12 @ \$53.87 36.40	D
52-380-005-1	Satin Chrome	6"	IN/MM	23.70	D

ELEVIDIE STEEL

FLEAIDLE SI	EEL NULES			
Order No.	Finish	Size	Reading	Sale Price
52-297-006-1	Black	6"	4R	\$22.80
52-297-012-1	Black	12"	4R	36.40
52-300-006-2	Satin Chrome	6"	5R	Compare to Starrett C305R-6 @ \$25.50 22.80
52-300-012-1	Satin Chrome	12"	5R	36.40
52-309-006-1	Golden	6"	5R	50.10
52-309-012-1	Golden	12"	5R	100.00
52-380-006-1	Satin Chrome	6"	IN/MM	22.80

Screw Pitch Gages



- Narrow designed blades permit use for internal and external screw threads
- · Locking device at each end to secure all blades for storage or position
- Correct pitch is determined by matching blade teeth with threads
- · Precisely around and finished
- Blades marked with thread size



52-485-051-0

Order No.	Description	List Price	Sale Price
52-485-051-0	Inch Screw Pitch Gage with 51 blades: 4 to 84 pitch standard V thread	\$55.00	\$44.00
52-485-018-0	Metric Screw Pitch Gage with 18 blades: 0.50 to 7.0mm	22.00	17.60
	center gage with coarse and fine notch included		
52-485-027-0	In/mm Screw Pitch Gage with 28 blades	22.00	17.60
	Inch: 4 to 56 pitch, Metric: 0.50 to 6.00mm		

American Made Tools!

Electronic Edge Finders · Six equally spaced light ports provide 54-575-600-0 visibility at any angle · Edge finder lights instantly when stylus touches work edge · Repeatability: 0.0002" · Works on any conductive metal 54-575-625-0 **SELLER** 54-575-650-0 Along with light indication, model #54-575-650-0 emits an audible "beep" at time of contact. Order No. Stylus Shank Audible Battery List Price Sale Price 54-575-600-0 0 200" 1/2" NO 12 volt \$42.00 \$37.80 54-575-625-0 0.200" 1/2" NO 12 volt 145.00 130.50

YES

12 volt

M5 Edge Finder

0.400"

3/4"

54-575-650-0

Order No.

52-575-040-0

52-575-045-0

52-575-060-0



130.50

145.00

Prices & Specifications are subject to change without notice.

Description

3/8" x 0.200"

1/2" x 0.200"

1/2" x 0.500"

55

Sale Price

\$18.40

17.60

17.60

List Price

\$23.00

22.00

22.00

Find

us on social media



HIGH PRECISION www.fowlerprecision.com

Headquarters

66 Rowe Street • Newton • Massachusetts 02466 (800) 788-2353 • (617) 332-4137 fax sales@fowlerprecision.com

Distribution Center & Showroom

Valencia, California 91355 28010 Industry Drive (415) 633-5354